


# Nacra 15 Flag Positioning & Application

- Our set of N15 flags contain 2 separate flags:
  - One (1) N15 Port flag
  - One (1) N15 Starboard flag
- The **port side flag** is indicated by a **RED** Nacra One Design Certification label
- The **starboard side flag** is indicated by a **GREEN** Nacra One Design Certification label

**(NOTE: Measurements described below are for older N15 mainsails ONLY. Our new N15 sails come with pre-drawn designations for flag placement.)**

1. Measure **a minimum of 110mm** from the bottom of the 3rd battentpocket down, and mark it.
2. Measure **a minimum of 110mm** from the top of the 4th battentpocket up, and mark it.
3. Measure **a minimum of 30mm** from the leech, and mark it. (See Nacra 15 Class Rule C.11.3 (d) i, and Section K for more details.)

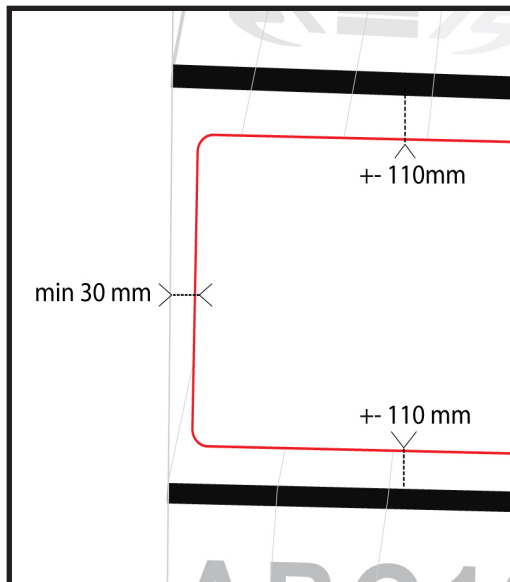

**(NOTE: The starboard side flag is mirrored)**


**(NOTE: The port side flag is NOT mirrored)**

## Tools needed:

- Measuring tape
- Small marker pen
- Any professional sail cleaner
- Clean, dry cloth

**(TIP: When placing the flags on the fabric, be as slow as possible with removing the bottom and top layers, as not to damage the flag.)**

1. Position your mainsail on a hard and flat surface.
2. Thoroughly clean area of grease and dirt. Make sure your sail is completely dry before applying your flags.
  - DO NOT use acetone based components!**
3. Locate the designated area for your flag: between the **3rd and 4th battentpocket**.

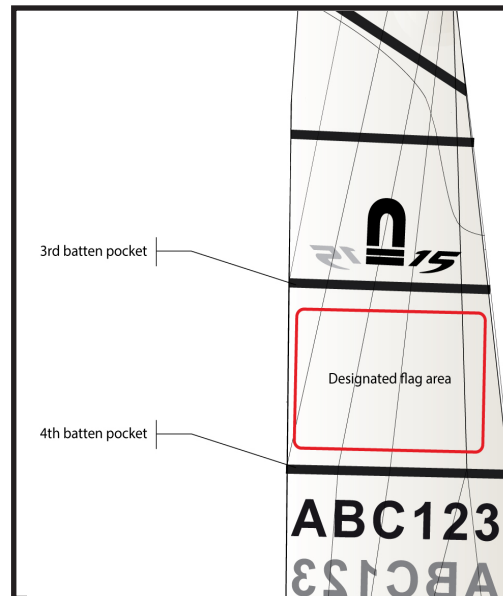

4. Start with the starboard side flag (**GREEN**).
5. Place the flag within your marked margins and slowly peel the bottom layer off, while sticking the flag to the sail, rubbing down with a clean dry cloth.
6. Once the flag is properly stuck in place, peel off the top layer.
7. (Optional) Take a rubber roller and further flatten the flag to remove excess air pockets and small imperfections, and for better adherence to the sail.
8. Flip over your mainsail, and make sure you can properly see the outline of the adhered flag.
9. Take your port side flag (**RED**) and position it to exactly match the starboard side flag.
10. Repeat steps 5, 6, and (optionally) 7.
11. Check if all flags are positioned correctly.

**(TIP: For more precise alignment before sticking: Peel a 10cm piece of bottom layer from one corner of the flag and fold it over on itself before applying the flag to the fabric.)**



**Port side**  
Nacra One Design  
Certification label



**Starboard side**  
Nacra One Design  
Certification label

